




Ferroperm™ Piezoelectric

Pz94 Very soft relaxor type PNN-PZT

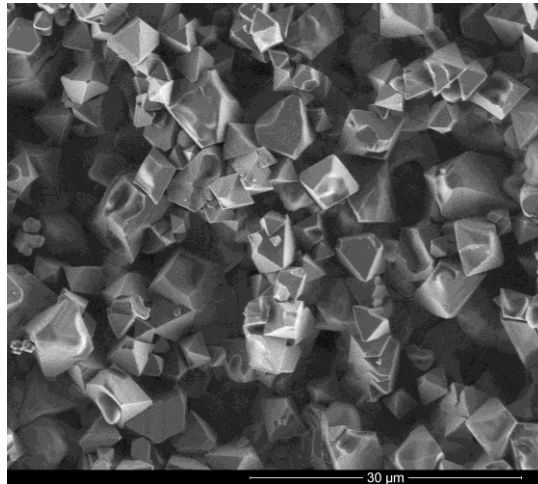

A very soft relaxor type PNN-PZT solid solution

Ferroperm Pz94 is a very soft piezoceramic material with very high coupling factors and charge coefficients. The material is specially optimised for applications where high sensitivity, low porosity and small grain-size are required in combination with high reproducibility of the performance from batch to batch.

Repeatable performance

The main focus through our entire production process is to provide materials and components with the highest possible reproducibility of properties and parameters and to obtain the lowest aging rates in the industry.

Our materials have a variation of $\pm 5\%$ for all parameters. This reduces the requirements for impedance matching, frequency tuning and dimensioning of the housing meaning fewer rejects and lower costs.

Customised solutions

We have more than 60 years of experience in the production of advanced piezoelectric ceramics. Our team has extensive expertise in customising designs to match the customer's needs.

Please contact us to discuss your requirements in further detail.

Key benefits

- Lowest batch to batch variation in the industry
- Stable material with consistent performance
- Customised or standard designs

Key features

- High sensitivity
- Low porosity
- Small grain size

Applications

- 1D and 2D medical arrays for imaging systems
- Shear Inkjet print heads
- High precision flowmeters

Contact

CTS Ferroperm

Porthusvej 4, DK-3490
Kvistgaard
Denmark
Tel: +45 49 12 71 00

e-mail: pz@ctscorp.com

www.ferropermpiezoceramics.com

CTS Ferroperm

Our product competencies and services:
Piezoelectric ceramics | Multilayer | Thick-film | InSensor® | PiezoPaint™



Ferroperm™ Piezoelectric

Pz94 Very soft relaxor type PNN-PZT

Material properties

Electrical	Symbol	Pz94
Relative dielectric permittivity at 1 kHz	K_{33}^T	4500
Dielectric dissipation factor at 1 kHz	$\tan \delta$	17×10^{-3}
Curie temperature	T_C	$\sim 185^\circ\text{C}$
Recommended working range	<	$\sim 105^\circ\text{C}$
Electromechanical		
Coupling factors	k_p	0.63
	k_t	0.50
	k_{33}	0.72
Piezoelectric charge coefficient	d_{33}	640 pC/N
Mechanical		
Mechanical Quality Factor	$Q_{m,P}^E$	60
Density	ρ	7.9 g/cm ³

Note: Due to continuous process improvement, specifications are subject to change without notice.
Please be aware that extreme dimensions and geometries can lead to exaggeration in tolerances in all materials.
Pz89 and Pz94 are a part of a full technology transfer of the Quartz & Silice programme from Saint-Gobain Quartz in 2010